


MODEL : ID-36B

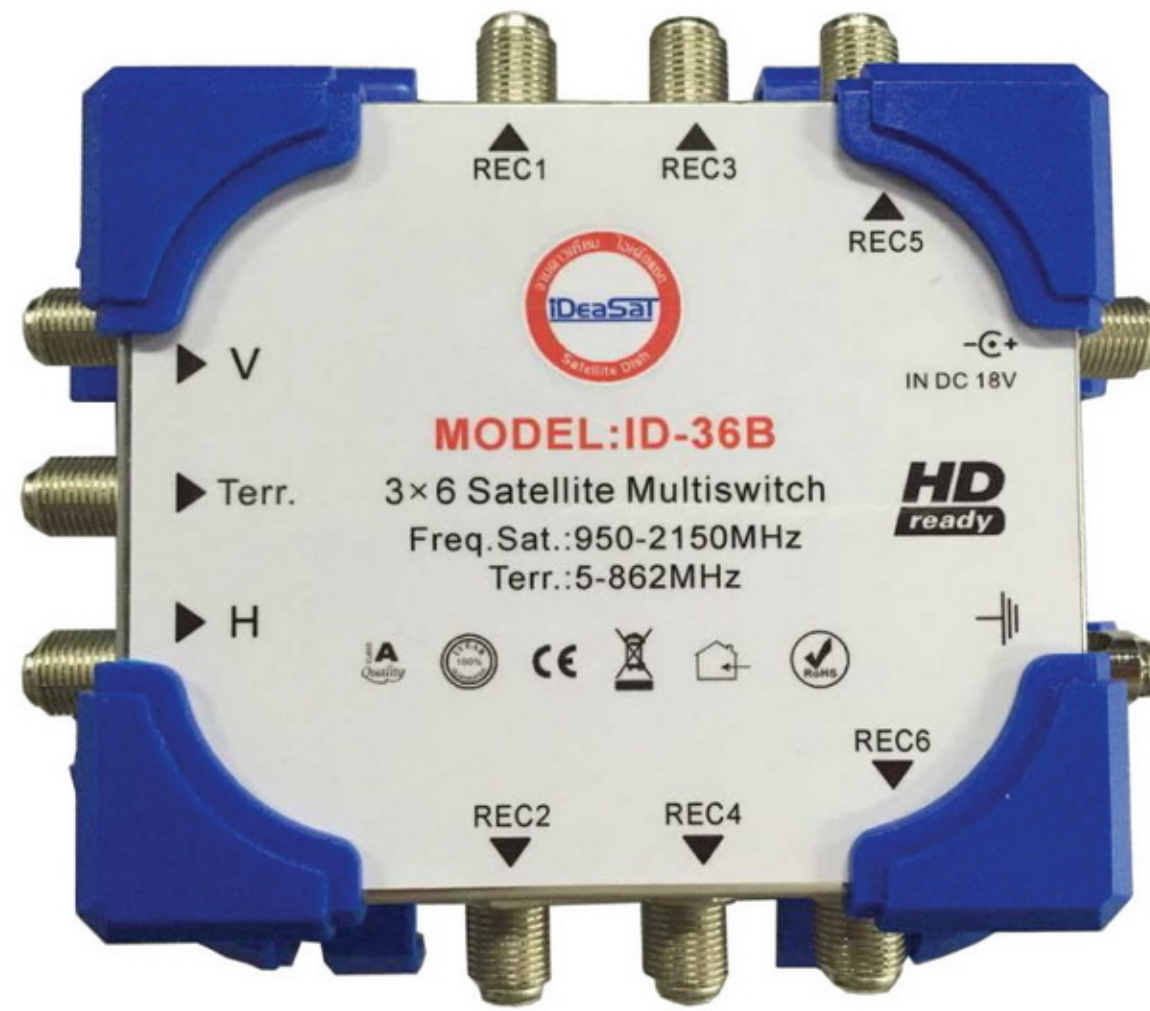

Featrues:

- 2 satellite IF and 1 terrestrial TV inputs for 6 satellite receiver
- 2 satellite IF inputs selected by 13V、 18V signal
- Built-in amplifier
- Low insertion loss, high isolation and return loss
- SAT-IF-PATHs to the subscribers are active and supplied by the receiver
- Sheet metal housing with plastic holder
- Design good for indoor usage

Specifications

Specifications Item		Typical	QC Limit	Remark
Frequency Range		Terr.:47~862MHz SAT:950~2150MHz		
Inputs		2 SAT+1 Terr		F connectors
Outputs		6 Receiver		F connectors
Insertion Loss	Terr	4dB(Gain)	2dB(Gain)	
	SAT	0dB	1dB	
Return Loss		12dB	10dB	
Isolation	REC-REC	35dB	30dB	
	H/V	30dB	25dB	
Switching Voltage		V:10~14.5V H:15~20V		
Power Adapter		IN:100~240V OUT:18V 0.5A		
Dimensions (L,W,H)		124×110×42		mm