## MODEL : ID-9932BT

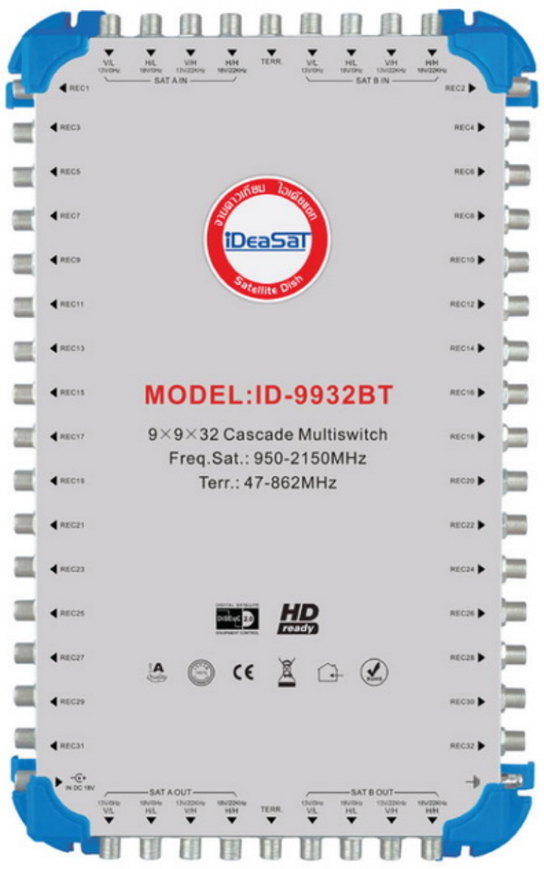


**Featrues:**

☐ 8 satellite IF and 1 terrestrial TV inputs for 32 satellite receiver
☐ 8 satellite IF inputs selected by 13V、18V、22KHz and DisEqC 2.0 signal
☐ Built-in amplifier
☐ Low insertion loss, high isolation and return loss
☐ SAT-IF-PATHs to the subscribers are active and supplied by the receiver
☐ Sheet metal housing with plastic holder
☐ Design good for indoor usage

**Specifications**

| Item | | Specifications | Remark |
|---|---|---|---|
| Frequency Range | | Terr.:47~862MHz SAT:950~2150MHz | |
| Inputs/outputs | | 8 SAT+1 Terr. / 8 SAT+1 Terr. | F connectors |
| Outputs/subscribers | | 32 | F connectors |
| Thru Loss | Terr. | 4dB | |
| | SAT | 3dB | |
| TAP Loss | Terr. | 5dB | |
| | SAT | 5dB | |
| Return Loss | Terr. | 10dB | |
| | SAT | 10dB | |
| Rejection | Terr./SAT | 30dB | |
| | SAT/terr. | 30dB | |
| Isolation | Trunk/trunk | 30dB | |
| | H/V | 30dB | |
| | REC-REC | Terr.:26dB SAT:30dB | |
| Switching Voltage | | V:10~14.5V H:15~20V | |
| Power supply | | IN:90~264V OUT:18V 2A | |
| Dimensions (w,d,h) | | 360×222×42 | mm |