


Wideband Amplifier : ID-124HG
 สำหรับขยายสัญญาณตลอดย่านความถี่

Features :

- 1 Input Wideband Amplifier(40MHz-860MHz)
- High Sensitivity Minimum Input Signal 35 dBuv
- Low Noise Digital TV Signal Booster Design
- High Signal to Noise Ratio (SNR)
- Aluminium and Steel Housing Design
- AC Power Supply (220V-240V) usage

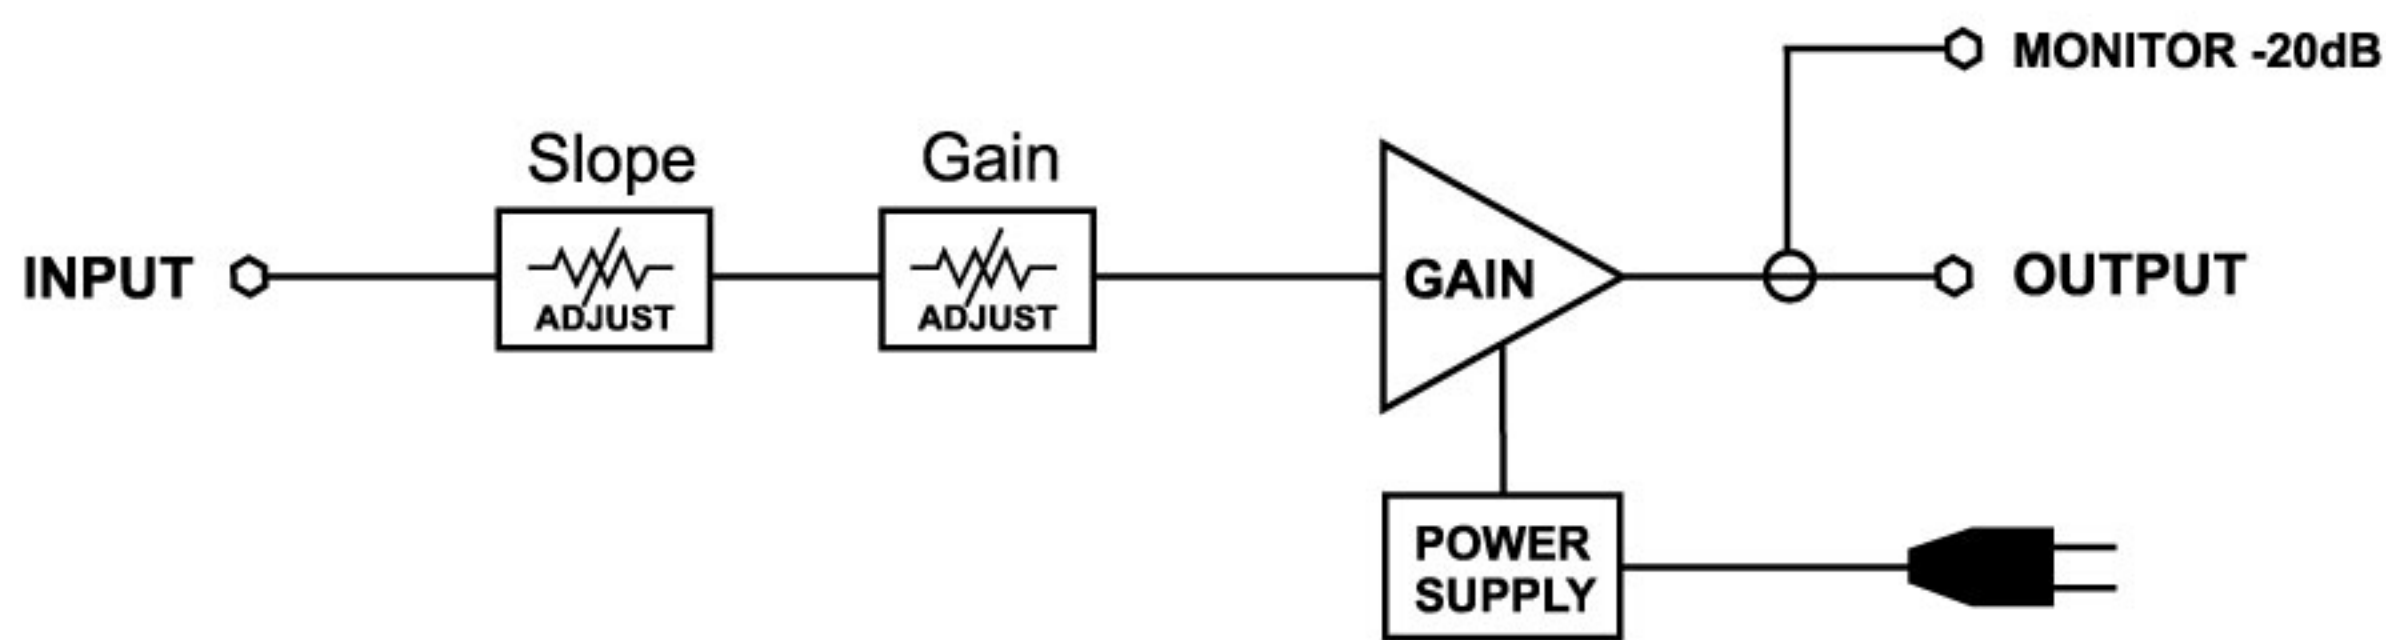

Wideband Amplifier : ID-124HG Block Diagram

Specifications

Input Frequency Range	40 MHz - 860 MHz
Input Insertion Gain	35 dB ± 2 dB
Noise Figure	< 10 dB
RF Port Input/Output Impedance	75 Ohm
Gain Adjust	20 dB
Slope Adjust	20 dB
Output Max(1CH)	124 dBuv
Current Consumption	450 mA
Power Supply	220-240 VAC
Ambient temperature	-20 ~ 50 °C
Dimensions(w,d,h) mm	150 x 190 x 52