


MODEL : ID-924B

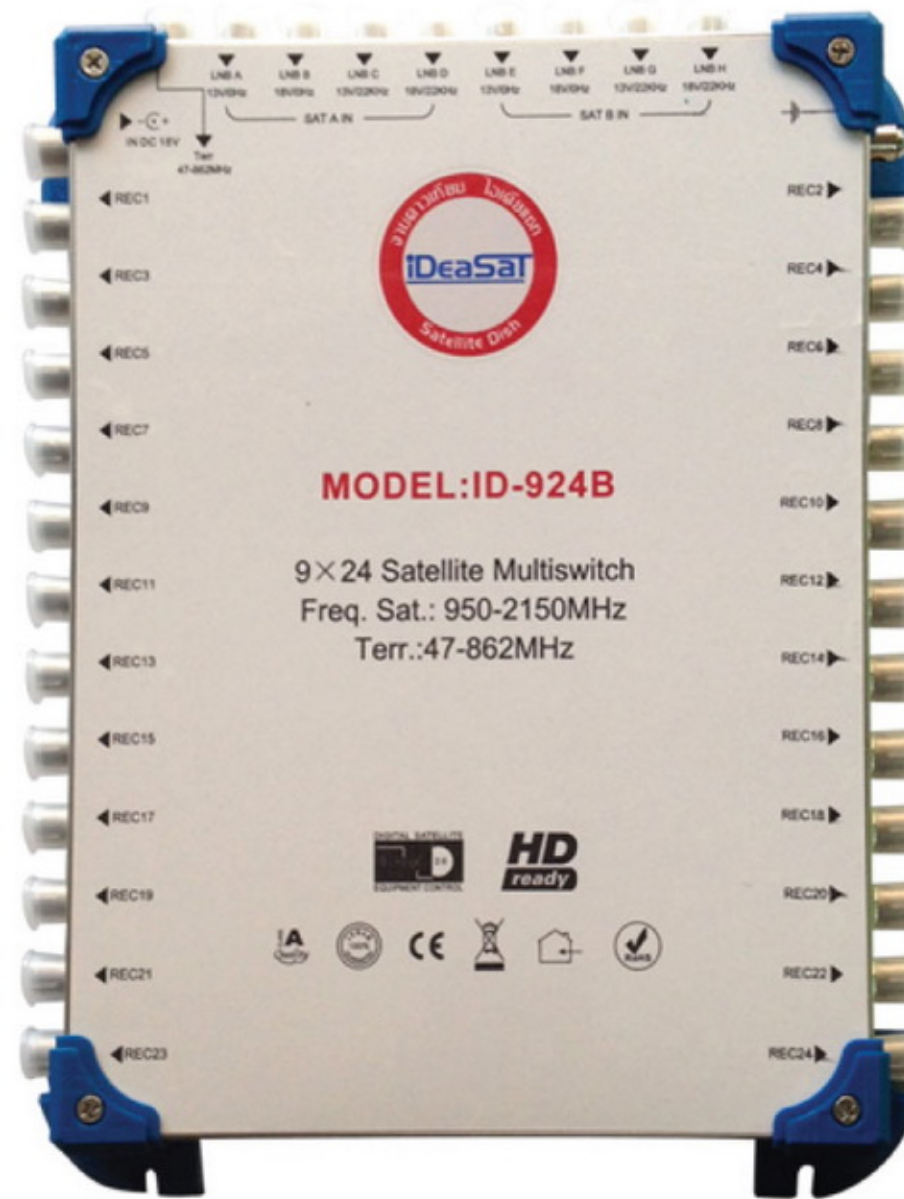

Features:

- 8 satellite IF and 1 terrestrial TV inputs for 24 satellite receiver
- 8 satellite IF inputs selected by 13V、18V、22KHz and DisEqC 2.0 signal
- Built-in amplifier
- Low insertion loss, high isolation and return loss
- SAT-IF-PATHs to the subscribers are active and supplied by the receiver
- Sheet metal housing with plastic holder
- Design good for indoor usage

Specifications

Item	Specifications	Remark
Frequency Range	Terr.:47~862MHz SAT:950~2150MHz	
Inputs	8 SAT+1 Terr.	F connectors
Outputs	24 Receiver	F connectors
Insertion Loss	Terr.	4dB
	SAT	4dB
Return Loss	Terr.	10dB
	SAT	10dB
Stop band attenuation	Terr.	25dB
	SAT	25dB
Isolation	H/V	30dB
	REC-REC	30dB
Switching Voltage	V:10~14.5V H:15~20V	
Power supply	IN:90~264V OUT:18V 1600mA	
Dimensions (w,d,h)	222x286x42	mm