


MODEL : ID-9916BT

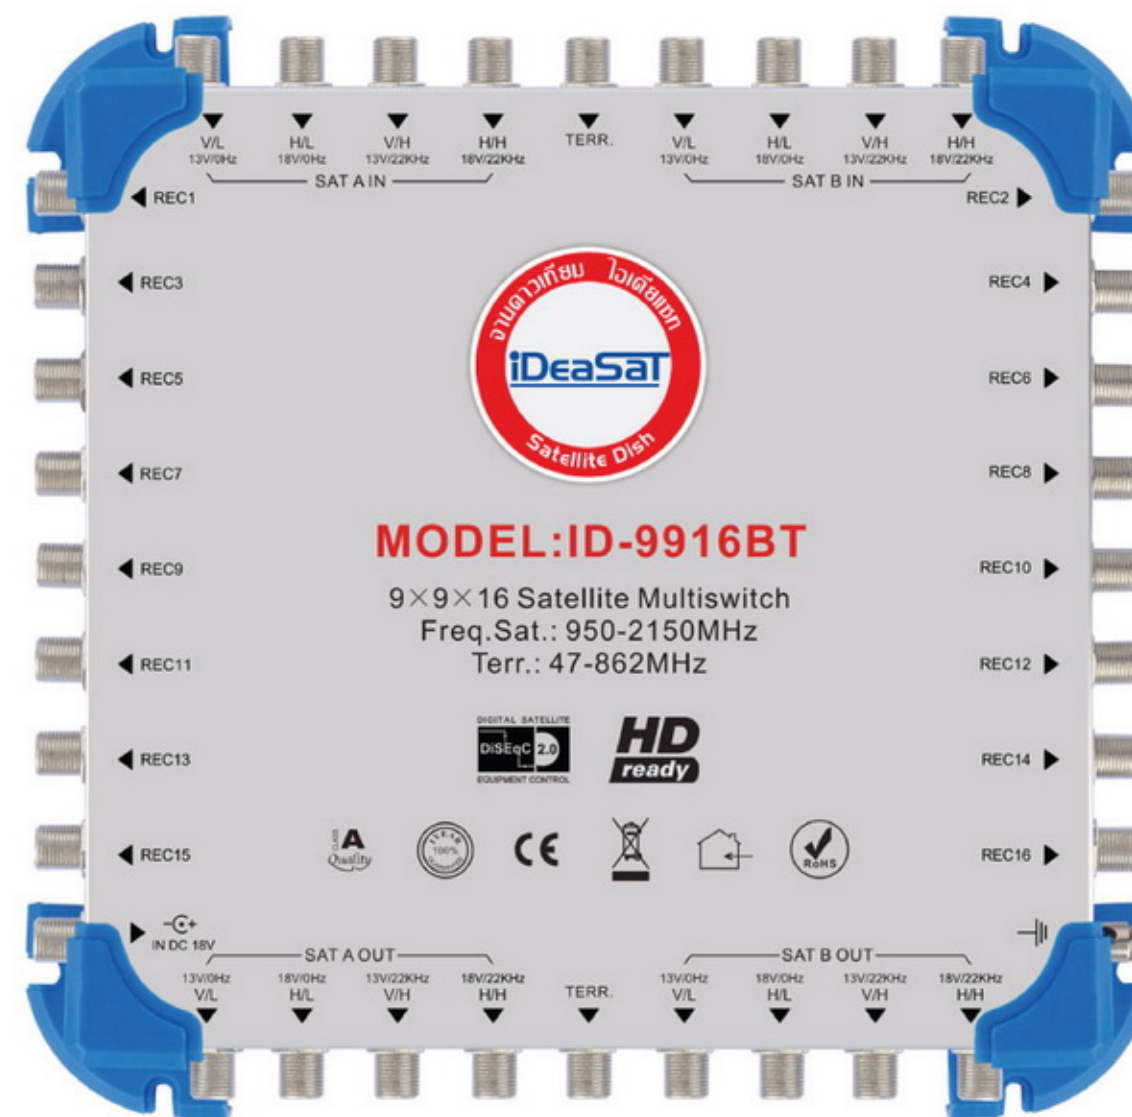

**Featrues:**

- 8 satellite IF and 1 terrestrial TV inputs for 16 satellite receiver
- 8 satellite IF inputs selected by 13V、 18V、 22KHz and DisEqC 2.0 signal
- Built-in amplifier
- Low insertion loss, high isolation and return loss
- SAT-IF-PATHs to the subscribers are active and supplied by the receiver
- Sheet metal housing with plastic holder
- Design good for indoor usage

**Specifications**

Item		Specifications	Remark
Frequency Range		Terr.:47~862MHz SAT:950~2150MHz	
Inputs/outputs		8 SAT+1 Terr. / 8 SAT+1 Terr.	F connectors
Outputs/subscribers		16	F connectors
Thru Loss	Terr.	4dB	
	SAT	3dB	
TAP Loss	Terr.	3dB	
	SAT	3dB	
Return Loss	Terr.	10dB	
	SAT	10dB	
Rejection	Terr./SAT	30dB	
	SAT/terr.	30dB	
Isolation	Trunk/trunk	30dB	
	H/V	30dB	
	REC-REC	Terr.:26dB SAT:30dB	
Switching Voltage		V:10~14.5V H:15~20V	
Power supply		IN:90~264V OUT:18V 2A	
Dimensions (w,d,h)		216×222×42	mm