



MODEL : ID-660/100M

Shield 60% / 100 M

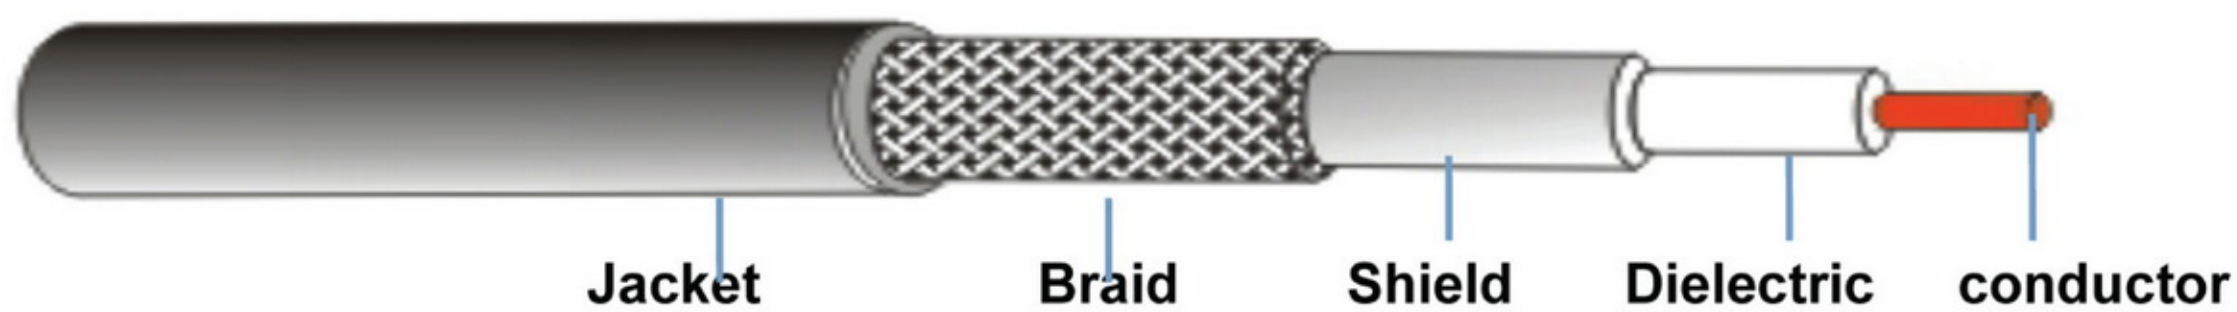

Inner conductor	1.02mm	15%
Material	Copper Clad Steel	
Dielectric	4.80mm	
Material	Foam Polyethylene	
Shield		
Material	Aluminum with bonded	
Coverage	100%	
Braiding		
Strand diameter	0.12mm	
Carriers	16	
Ends	4	
Material	Aluminum wire	
Coverage	60%	
O.D	5.40mm	
Jacket		
Thickness	0.80mm	
Material	PVC	
Color	White/ Black	
O.D	6.8mm	

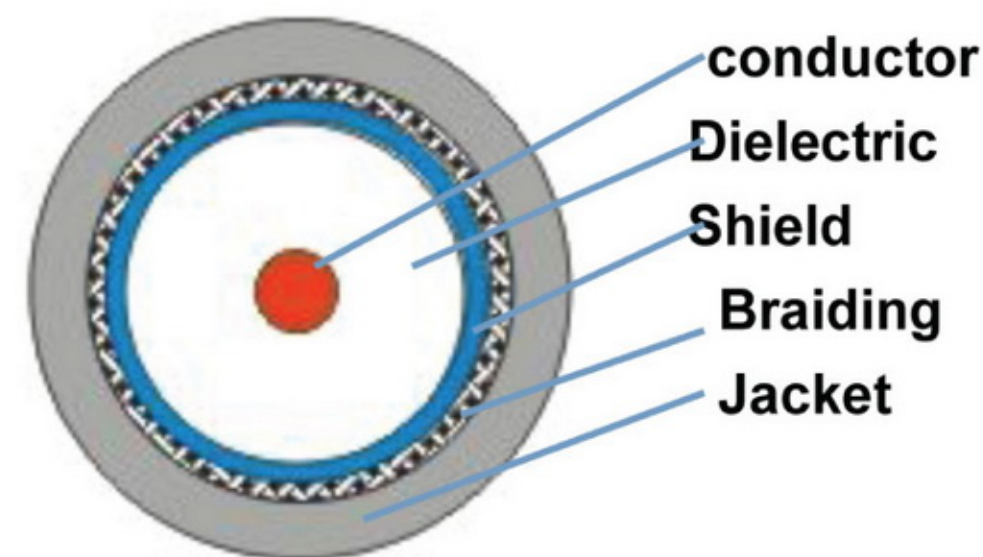

**Electrical Characteristics:**

Impedance	75±3 Ohm @210MHZ
Velocity	88%
Return loss	5-1000MHz ≥20Db
Capacitance(1KHz)	48pf/m
Dielectric breakdown	2500VDC
Jacket spark	3000Vac
Inner DC resistance (20°C)	146.3Ohms/km
Loop DC resistance (20°C)	40.6Ohms/km

**Printing:**

iDeaSaT RG6/U 2.4GHz(64×0.12) Professional Coaxial Cable 60%100M..099M.....001M

**Packing:**

100m/roll,6rolls/Cartons