


MODEL : ID-690/100M

Shield 90% / 100 M



	Jacket	Braid	Shield	Dielectric	conductor
Inner conductor	1.02mm	15%			
Material		Copper Clad Steel			
Dielectric	4.80mm				
Material		Foam Polyethylene			
Shield					
Material		Aluminum with bonded			
Coverage		100%			
Braiding					
Strand diameter	0.12mm				
Carriers	16				
Ends	8				
Material		Aluminum wire			
Coverage	90%				
O.D	5.40mm				
Jacket					
Thickness	0.80mm				
Material		PVC			
Color		white/ Black			
O.D	6.8mm				

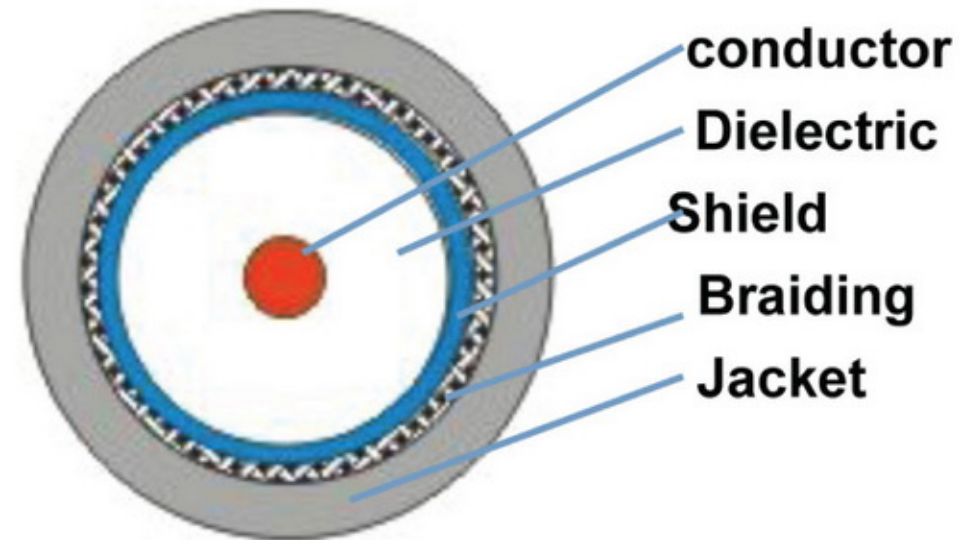

Electrical Characteristics:

Impedance	75±3 Ohm @210MHZ
Velocity	88%
Return loss	5-1000MHz ≥20Db
Capacitance(1KHz)	46pf/m
Dielectric breakdown	2500VDC
Jacket spark	3000Vac
Inner DC resistance (20°C)	140.663Ohms/km
Loop DC resistance (20°C)	23.6Ohms/km

Printing:

iDeaSaT RG6/U 2.4GHz(128×0.12) Professional CCTV Coaxial Cable 90% 305M. 304M. . . 001M

OR 100M.99M...001M

Packing: 100m/roll