



MODEL : ID-690/305M

Shield 90% / 305 M

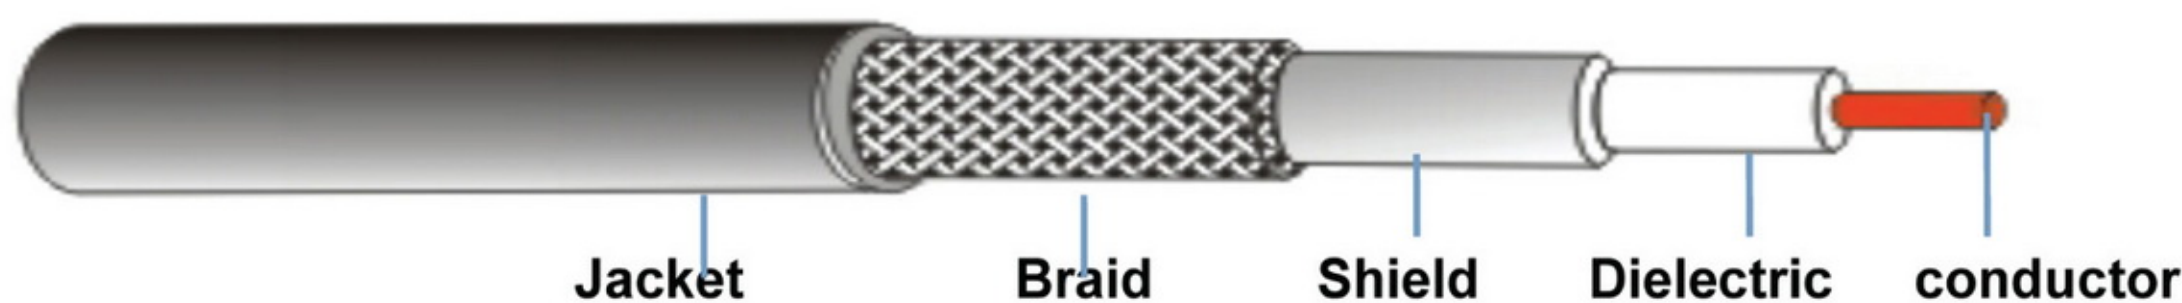

Inner conductor	1.02mm	15%
Material	Copper Clad Steel	
Dielectric	4.80mm	
Material	Foam Polyethylene	
Shield		
Material	Aluminum with bonded	
Coverage	100%	
Braiding		
Strand diameter	0.12mm	
Carriers	16	
Ends	8	
Material	Aluminum wire	
Coverage	90%	
O.D	5.40mm	
Jacket		
Thickness	0.80mm	
Material	PVC	
Color	white/ Black	
O.D	6.8mm	

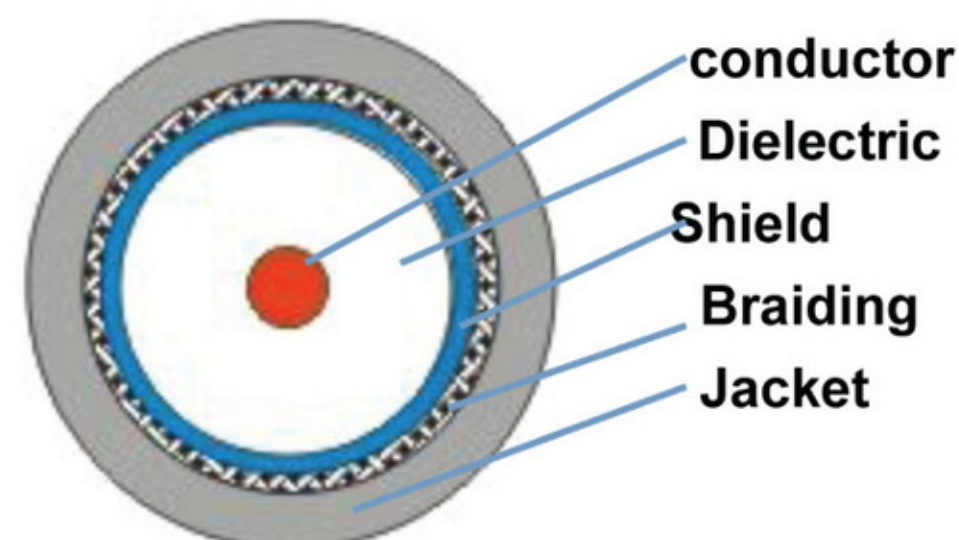

Electrical Characteristics:

Impedance	75±3 Ohm @210MHZ
Velocity	88%
Return loss	5-1000MHz ≥20Db
Capacitance(1KHz)	46pf/m
Dielectric breakdown	2500VDC
Jacket spark	3000Vac
Inner DC resistance (20°C)	140.663Ohms/km
Loop DC resistance (20°C)	23.6Ohms/km

Printing:

iDeaSaT RG6/U 2.4GHz(128×0.12) Professional CCTV Coaxial Cable 90% 305M. 304M. . . 001M

OR 100M.99M...001M

Packing:

305m/roll