


MODEL : ID-95AC/305M

Shield 95% / 305 M



**Cable Construction Details:**

Inner conductor	1.02mm	21%
Material	Copper Clad Steel	
Dielectric	4.80mm	
Material	Foam Polyethylene	
Shield		
Material		
Braiding		
Strand diameter	0.12mm	
Carriers	16	
Ends	10.5	
Material	Aluminum wire	
O.D	5.45mm	
Jacket		
Thickness	0.85mm	
Material	PVC	
Color	Black	
O.D	6.9mm	

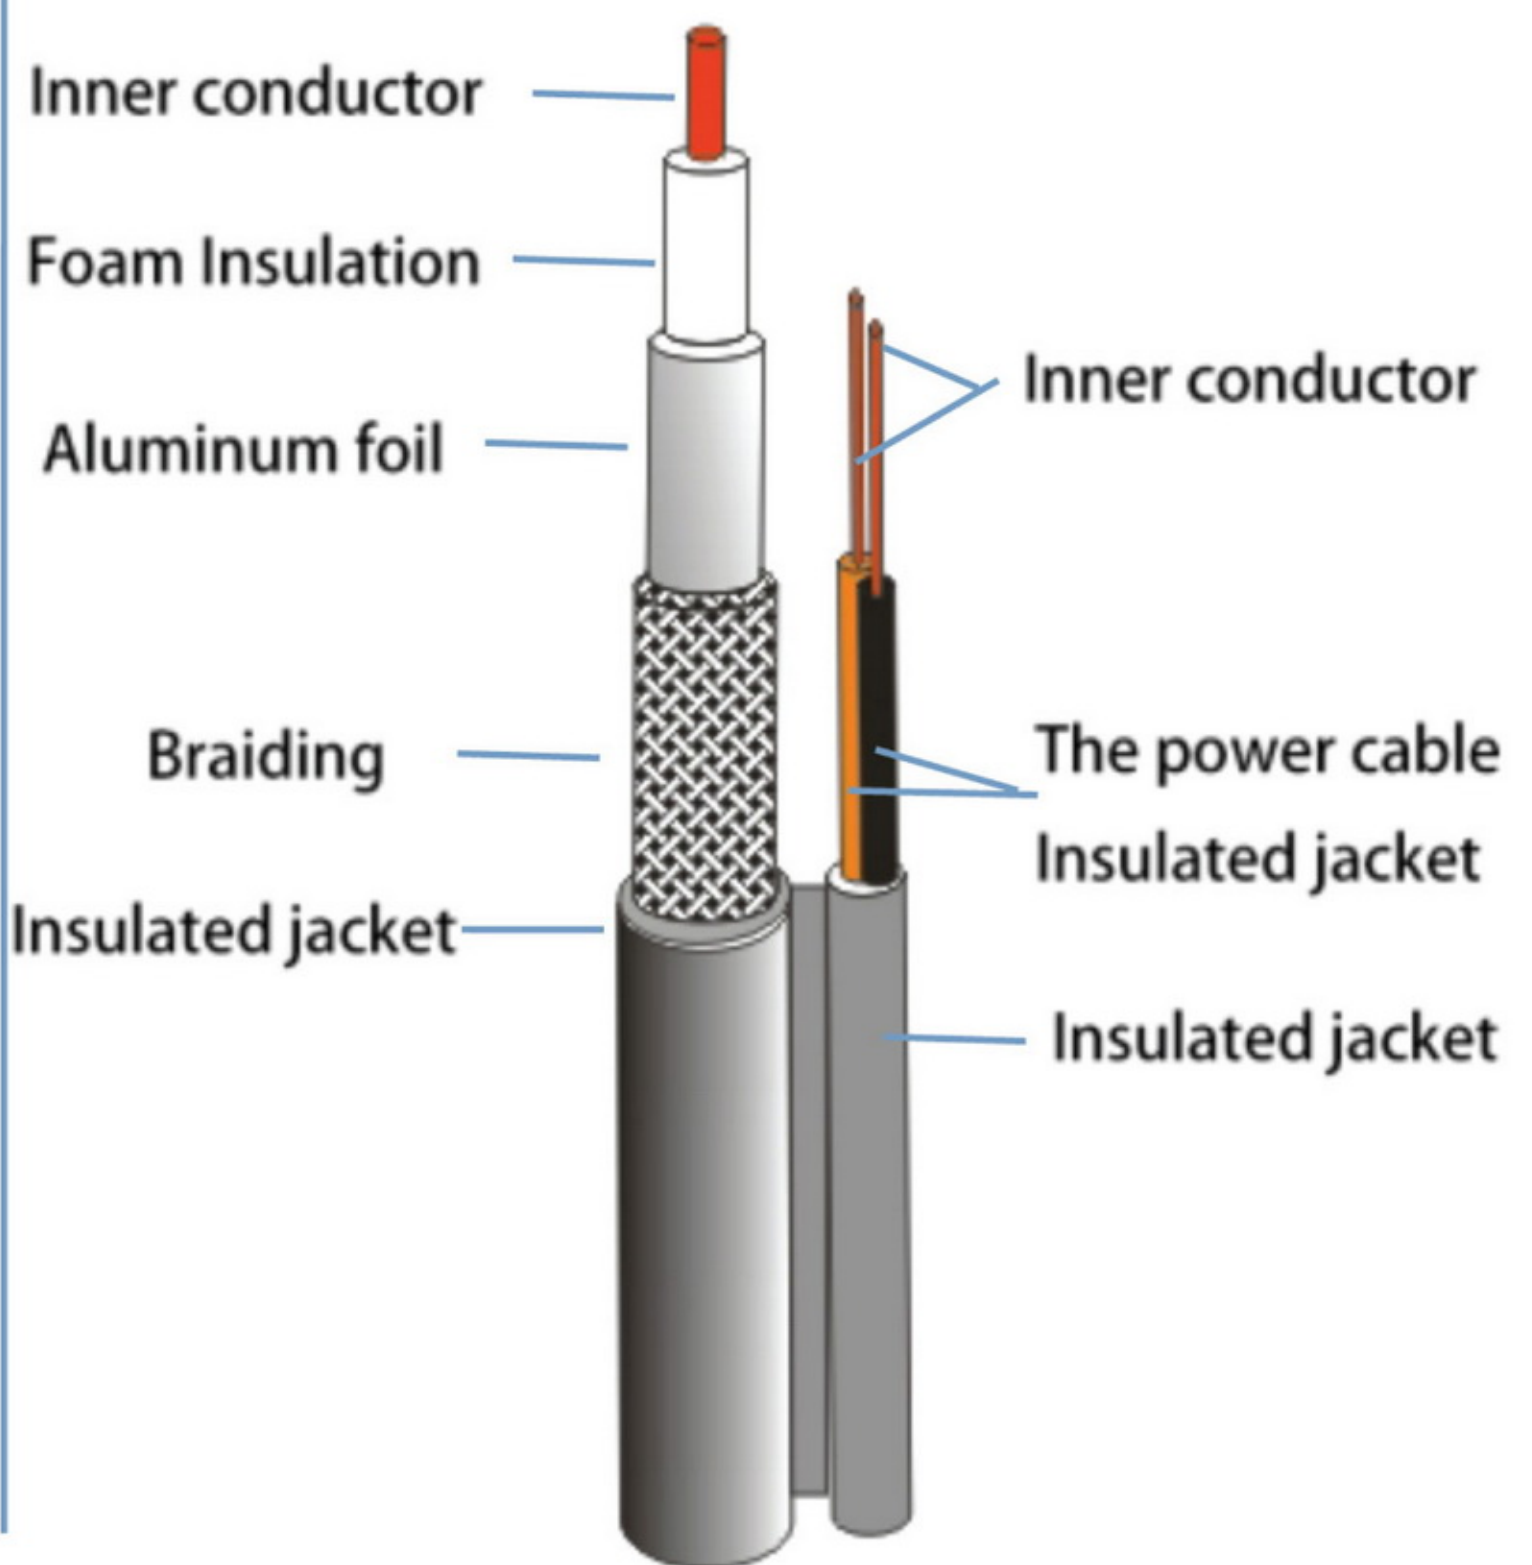


**Power cable:**

Inner conductor:	7*0.4CCA
Jacket:	2*1.7mm PE(one black and one red)

**Electrical Characteristics:**

Impedance	75±3 Ohm @210MHZ
Velocity	95%
Return loss	5-1000MHZ ≥20Db
Capacitance(1KHz)	49.5pf/m
Dielectric breakdown	2500VDC
Jacket spark	3000Vac
Inner DC resistance (20°C)	100.5Ohms/km
Loop DC resistance (20°C)	12.9Ohms/km

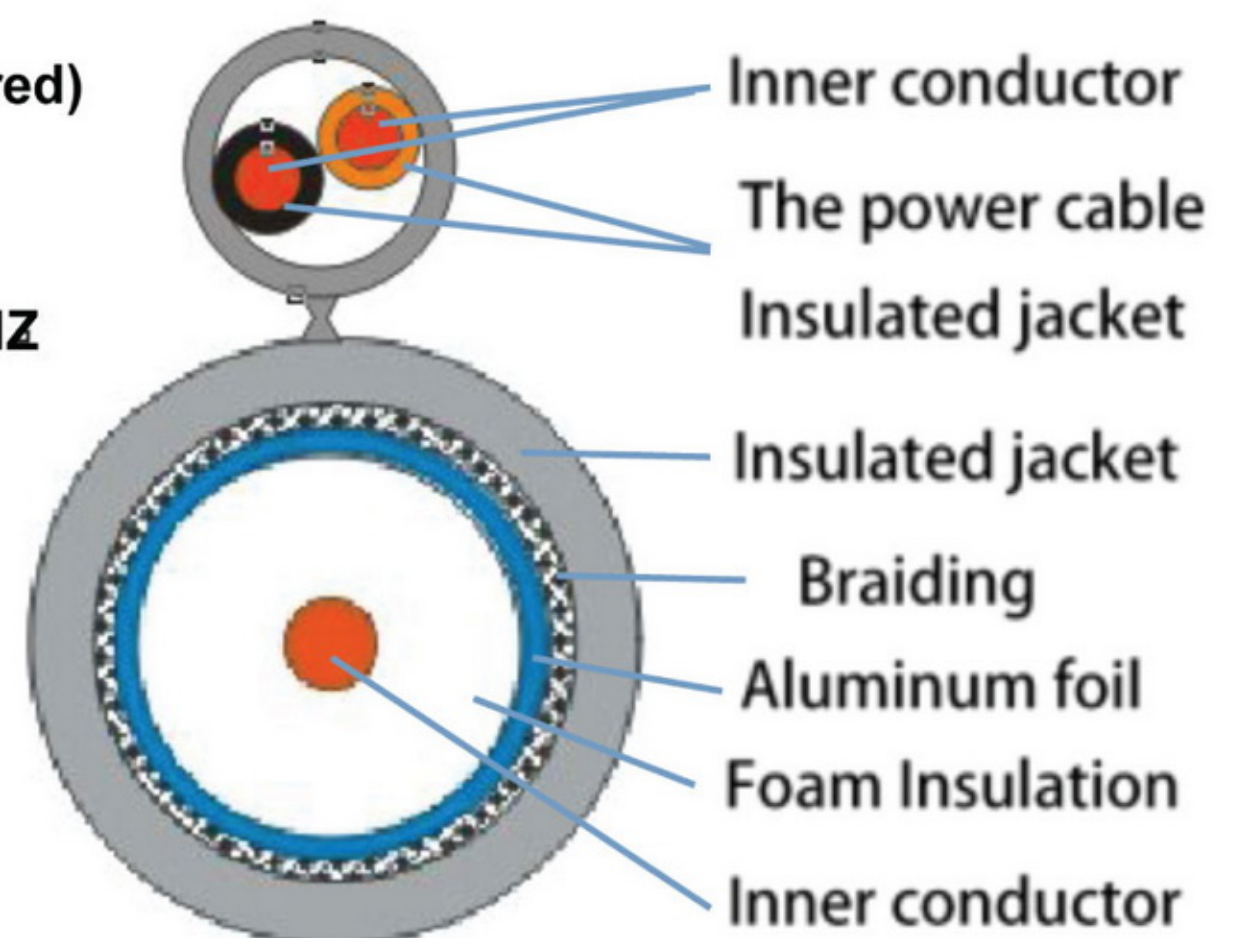

**Printing:**

**iDeaSaT** RG6/U 2.4GHz(168\*0.12) Professional CCTV Coaxial Cable 95% 305M.....001M

**Packing:**

305m/roll,1roll/carton.