


MODEL : ID-998BT

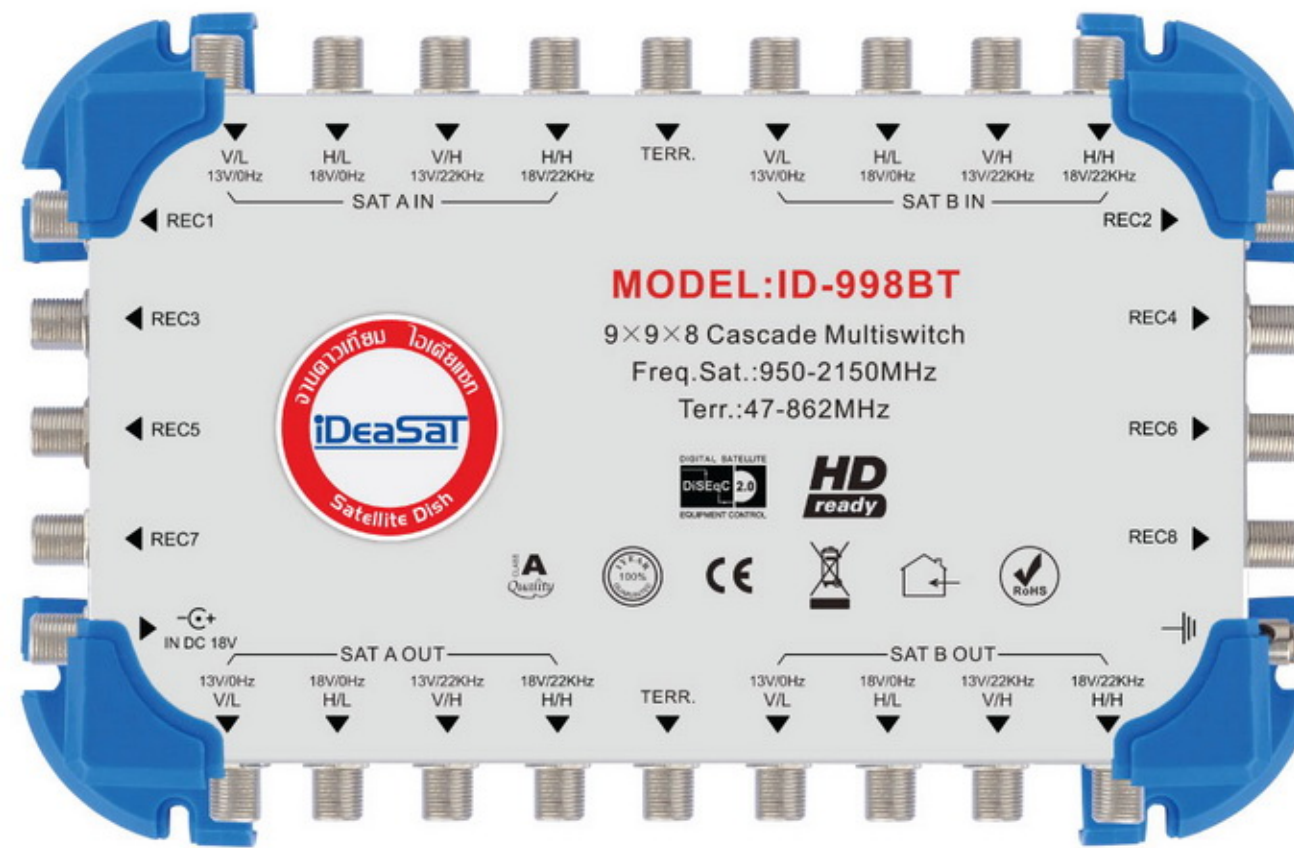

Featrues:

- 8 satellite IF and 1 terrestrial TV inputs for 8 satellite receiver
- 8 satellite IF inputs selected by 13V、18V、22KHz and DisEqC 2.0 signal
- Built-in amplifier
- Low insertion loss, high isolation and return loss
- SAT-IF-PATHs to the subscribers are active and supplied by the receiver
- Sheet metal housing with plastic holder
- Design good for indoor usage

Specifications

Item	Specifications	Remark
Frequency Range	Terr.:47~862MHz SAT:950~2150MHz	
Inputs/outputs	8 SAT+1 Terr. / 8 SAT+1 Terr.	F connectors
Outputs/subscribers	8	F connectors
Thru Loss	Terr.	3dB
	SAT	3dB
TAP Loss	Terr.	2dB
	SAT	2dB
Return Loss	Terr.	10dB
	SAT	10dB
Rejection	Terr./SAT	30dB
	SAT/terr.	30dB
Isolation	Trunk/trunk	30dB
	H/V	30dB
	REC-REC	Terr.:26dB SAT:30dB
Switching Voltage	V:10~14.5V H:15~20V	
Power supply	IN:90~264V OUT:18V 2A	
Dimensions (w,d,h)	144x222x42	mm